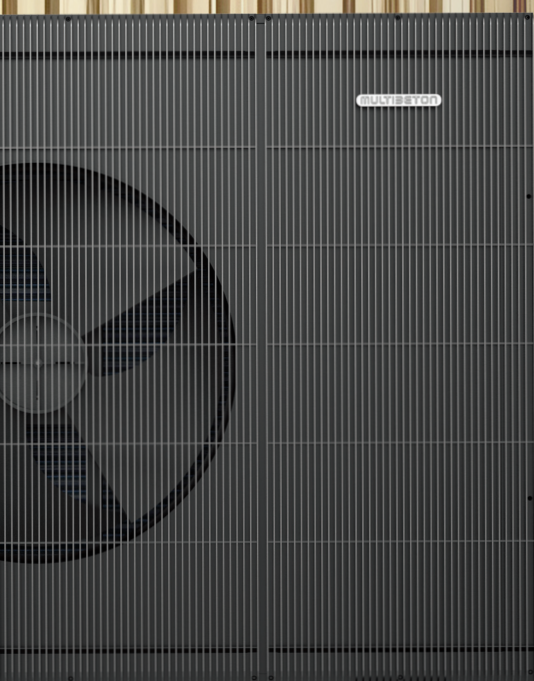


Heat pumps & hydraulic station The outdoor and indoor units	01 - 02
System storage for heating, hot water, and domestic water	03
Pump groups Heat and cooling distribution	04 - 06
Pump group accessories Accessories for heat and cooling distribution	07 - 08
Water treatment for cooling water and heating water circuits	09 - 10
Outdoor/indoor connections Floor pipes and accessories	11
Additional accessories & Service	12
Heat pump spare parts	13





Warmondo Heat pumps

Warmondo air-to-water heat pumps from MULTIBETON achieve the same efficiency levels in buildings with radiators as other air-to-water heat pumps in new buildings with underfloor heating. This is ensured by various technical refinements and innovations:

- Innovative optimisation of fluid dynamics
- Double structure-borne sound decoupling
- Pressure-loss-optimised evaporator geometry
- Demand-based and predictive speed control (inverter)

The natural refrigerant propane (R290) used in the Warmondo heat pump is characterised by its excellent environmental profile and extremely low carbon footprint. It fully complies with the environmental requirements of the F-Gas Regulation.

WP000061-1	Warmondo WM-S	6 kW
WP000091-1	Warmondo WM-M	9 kW
WP000133-1	Warmondo WM-L	13 kW
WP000163-1	Warmondo WM-XL	16 kW

Scope of Delivery: Installation manual, energy label, vibration dampers, drain flange, carrying strap incl. mounting material;



Warmondo WM-Cover

The cover housing is used to cover the floor line leading to the outdoor unit.

WP000991	WM-Cover N	(280 x 280 x 280 mm)
WP000992	WM-Cover H	(280 x 280 x 280 mm)
WP000993	WM-Cover L	(280 x 280 x 280 mm)
WP000994	WM-Cover K	(280 x 280 x 280 mm)
WP000995	WM-Cover HK	(280 x 280 x 280 mm)



Warmondo Hydraulic station

The hydraulic station is equipped with a touch controller, additional flow control components, a 3-way valve and sensors. The hydraulic station allows for direct connection to the heating system and optimises the hydraulic balancing of the entire system. Its modular design enables high installation flexibility, reduced installation effort, and system-optimised flow control.

WP000013-1	Warmondo WM-HDS	9 kW
WP000800	Ball valve set WM-HDS	

The cover is also available as individual parts, so that structural conditions at the rear of the outdoor unit can be compensated for.

WP000990-1	WM-Cover base	(280 x 280 mm)
WP000990-2	WM-Cover side N	(280 x 280 mm)
WP000990-3	WM-Cover front N	(280 x 280 mm)
WP000990-4	WM-Cover top N	(280 x 280 mm)
WP000990-5	WM-Cover side L	(280 x 480 mm)
WP000990-6	WM-Cover top L	(280 x 480 mm)
WP000990-7	WM-Cover side H	(480 x 280 mm)
WP000990-8	WM-Cover front H	(480 x 280 mm)
WP000990-9	WM-Cover top K	(280 x 200 mm)
WP000990-10	WM-Cover side K	(280 x 200 mm)
WP000990-11	WM-Cover side HK	(480 x 200 mm)

Technical Specifications

Heat pump

Performance rating (A2/W35)
Rated heating capacity (EN 14511)
SCOP (EN 14825)
Energy efficiency class (EN 14825)
Sound pressure level at 1 m

Heating

Heating capacity (A2/W35)
Power consumption
Operating current
Max. power consumption
Max. operating current
Heating capacity variable (A7/W35)
Heating capacity variable (A2/W35)
Heating capacity variable (A-7/W35)
Heating capacity variable (A-7/W55)

Max. supply water temperature

Outdoor temperature

Power supply

Nominal water flow rate

Compressor

Circulation pump

Water heat exchanger

Air heat exchanger

Fan/fan motor

Controller

Refrigerant

Supply/return connections

Protection rating

Protection class

Net weight

Unit dimensions (L x W x H)

Cooling

Cooling capacity

Power consumption

Operating current

EER

Cooling capacity variable (A35/W15)

Cooling capacity variable (A35/W7)

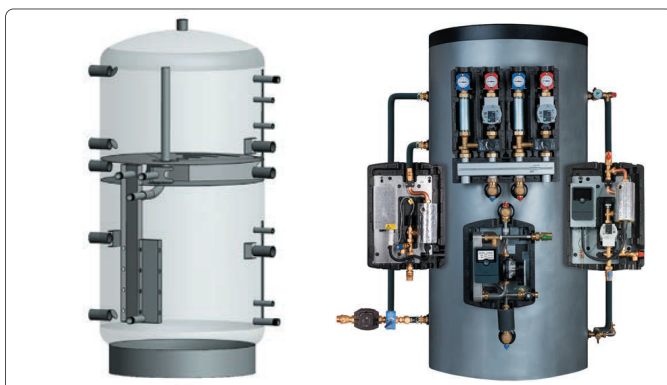
WM-S	WM-M	WM-L	WM-XL
6 kW	9 kW	13 kW	16 kW
4.9 kW	7.1 kW	10.0 kW	12.9 kW
5.08	5.05	5.05	5.07
A+++/A++			
31 dB(A)	38 dB(A)	39 dB(A)	38 dB(A)
5.97 kW	8.48 kW	12.76 kW	15.28 kW
1.51 kW	2.20 kW	3.30 kW	4.04 kW
6.67 A	9.40 A	4.83 A	5.93 A
2.80 kW	4.50 kW	5.40 kW	5.80 kW
14.40 A	19.80 A	8.25 A	8.90 A
2.84 - 6.30 kW	4.04 - 8.99 kW	5.51 - 13.15 kW	6.86 - 16.37 kW
2.69 - 5.97 kW	3.82 - 8.48 kW	5.42 - 12.76 kW	6.48 - 15.28 kW
2.29 - 5.69 kW	3.26 - 8.10 kW	4.63 - 11.75 kW	5.53 - 14.03 kW
2.22 - 5.52 kW	3.16 - 7.85 kW	4.40 - 11.17 kW	5.15 - 13.07 kW
75 °C			
-25 to +43 °C			
230 V/1~/50 Hz	230 V/1~/50 Hz	400 V/3~/50 Hz	400 V/3~/50 Hz
1.03 m³/h	1.55 m³/h	2.20 m³/h	2.75 m³/h
MITSUBISHI® reciprocating compressor Wilo® Para direct current Brazen plate heat exchanger (BPHE) Copper tube heat exchanger with aluminum fins (CTAFC) Axial/DC 7-inch IPS 600×1024 color touchscreen display R290 5/4" IPX4 I			
146 kg	160 kg	205 kg	212 kg
1,102 × 557 × 1,021 mm		1,377 × 557 × 1,021 mm	
4.91 kW	6.96 kW	9.13 kW	11.80 kW
1.60 kW	2.23 kW	2.99 kW	3.78 kW
7.03 A	9.79 A	4.55 A	5.81 A
4.32	4.31	4.34	4.38
2.41 - 5.35 kW	4.02 - 7.66 kW	4.50 - 10.00 kW	5.59 - 12.42 kW
2.21 - 4.91 kW	3.65 - 6.96 kW	4.28 - 9.52 kW	5.28 - 11.74 kW

Hydraulic station

Max. heating capacity
Power supply
Max. operating current
Max. flow temperature
Connections for supply/return
Connections for domestic hot water
Connections for heating water
Sound pressure level at 1 m
Unit dimensions (L x W x H)
Net weight
Protection rating
Protection class

WM-HDS

9 kW
400 V/3~/50 Hz
13.7 A
75 °C
5/4"
1"
1"
30 dB(A)
418 × 310 × 750 mm
35 kg
IPX1
I


tubra®-system storage

The all-in-one storage tank for heating, hot water, PV heat, heat pumps, biomass, and solar. Various heat generators can be connected to this universal system storage tank. It is ideally suited for hybrid heating systems combining conventional heat generators and heat pumps.

- System reliability with optimal energy utilization thanks to a stratified flow-through chimney for the heating circuit return
- Power-to-heat stratified charging – the storage tank is 100% stratified
- Space-saving installation
- Low installation effort due to internal piping
- Optimally coordinated components

System storage without solar coil

WP010000.500	tubra system storage PFW 500	480 l
WP010000.800	tubra system storage PFW 800	718 l
WP010000.1000	tubra system storage PFW 1000	887 l

System storage with solar coil

WP010001.500	tubra system storage PFWR 500	480 l
WP010001.800	tubra system storage PFWR 800	718 l
WP010001.1000	tubra system storage PFWR 1000	887 l


tubra®-WP-DUO 300/100

Power center for heat pump systems

- No mixing thanks to the separation of hot water and heating buffers, ensuring high annual performance factors for the heat pump
- Hot water heating via a fresh water station, providing high hot water comfort and hygiene at a buffer temperature of just 50 °C
- Hot water protection zone for consistently high hot water comfort via a stratification plate
- Compact design and low weight

WP010010 tubra WP-Duo 300/100

306 l/95 l


Heat Pump Cold Buffer Tank WPPS

The WPPS is a compact, robust buffer tank developed specifically for use with heat pumps. It combines cost-effectiveness, functionality and a well-thought-out design – ideal for stable hydraulics and efficient operation of the heat pump system.

- Inner tank made of sheet steel St 37
- Operating pressure: 6 bar (for WPPS 130: 3 bar)
- PU insulation: 50 mm direct-foamed polyurethane foam
- Outer casing: Powder-coated sheet steel, silver-grey
- Flange: Ø 180 mm with mounted blind flange + insulating cap (e.g. for finned tube heat exchanger or built-in heater)
- 6/4" socket for installation of an electric heater or additional connections
- Male thread connections and reinforced outer casing by flanging
- For cooling operation (cold buffer): connection area and flange must be insulated in a diffusion-tight manner on site

WP010100	WPPS Cold Buffer Tank 130	130 l
WP010101	WPPS Cold Buffer Tank 300	300 l


tubra®-PGR pump unit without mixer

With wall mount, 35 kW (ΔT 10 K), 70 kW (ΔT 20 K)

WP020000

tubra PGR DN 25 with Wilo Para 25/6 SCU

WP020010

tubra PGR DN 32 with Wilo Para 25/8 SCU


tubra®-PGM pump unit with mixer

With 3-way mixer, constant-temperature control, and wall mount

k_{ys} 8: 35 kW (ΔT 10 K), 70 kW (ΔT 20 K)

WP020100

tubra PGM DN 25 with Wilo Para 25/6 SCU

WP020110

tubra PGM DN 32 with Wilo Para 25/8 SCU


tubra®-PGR pump unit with mixer & magnetic separator

With wall mount, 35 kW (ΔT 10 K), 70 kW (ΔT 20 K)

WP020200

tubra PGR D DN 25

with Wilo Para 25/6 SCU

WP020210

tubra PGR D DN 32

with Wilo Para 25/8 SCU


tubra®-nemux S/M

Electronically controlled fresh water station with many options, such as circulation programs, cascade function with up to 4 stations, and hygiene programs.

WP021000

tubra nemux S 70 kW, copper

WP021001

tubra nemux S VE 70 kW, stainless steel

WP021010

tubra nemux M 100 kW, copper


WP021011

tubra nemux M VE 100 kW, stainless steel


tubra®-Zirku-Set

Circulation kit with circulation pump, shut-off ball valve, flushing valve, gravity brake, and immersion sleeve, including a Pt1000 temperature sensor.

WP021090 **tubra Zirku-Set** with Wilo Para Z


tubra®-eTherm C 3/C 9

3 kW or 9 kW electric boiler with target temperature control and a reheating thermostat for use as an external buffer tank charger powered by electricity. Can be used as a 3 kW or 9 kW Power-to-Heat hydraulic module for external power electronics such as Fronius Ohmpilot, my-PV AC: Thor, Elios4You, SMA Sunny Home Manager, and others.

WP022000 **tubra eTherm C 3** 3 kW
WP022030 **tubra eTherm C 9** 9 kW


tubra®-eTherm S

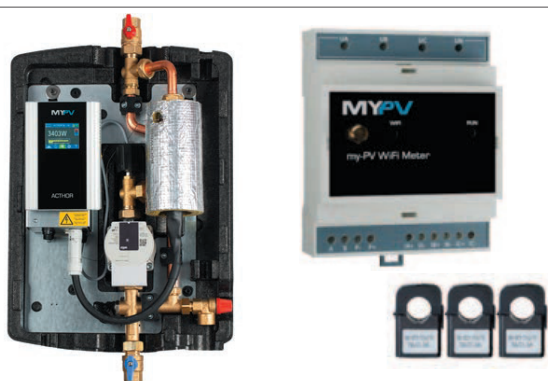
Set consisting of power electronics, a sensor unit including current clamps, and a 3 kW electric heating element

WP022010 **tubra eTherm S**


tubra®-eTherm P

Hydraulic unit with integrated control and modulating power electronics, featuring a sensor unit for measuring excess photovoltaic power for thermal storage in buffer tanks. Internal heating capacity: 0 – 3 kW, expandable to 12 kW with external heating units

WP022020 **tubra eTherm P**


tubra®-eTherm AC·THOR 9s

The tubra®-eTherm AC·THOR 9s is a hydraulic unit with integrated control. Using my-PV's AC·THOR 9s power electronics, it converts excess photovoltaic power into heat and stores the energy generated to optimize self-consumption.

WP022040 **tubra eTherm AC·THOR 9s**

my-PV WiFi Meter

Analyses the energy flows of the system and transmits the information on excess power to the photovoltaic power manager AC·THOR 9s. Incl. 3 clamp-on current transformers up to 3 x 75 A (52 kW).

WP022041 **my-PV Wifi Meter**



tubra®-PGS multi

Two-circuit solar station without control unit

WP020300 tubra PGS multi with Wilo Para ST 15/7 iPWM2



tubra®-PGS-C multi

Two-circuit solar station with control unitg Resol DeltaSol CS plus

WP020301 tubra PGS-C multi with Wilo Para ST 15/7 iPWM2



tubra®-STM S

Actuator 24 V AC/DC 0-10 V, 24 V AC/DC 110 s/90°

WP020299 tubra-STM S



tubra®-VM St DN 25

Steel manifold, closed design for up to 2 heating circuits, DN 25, center-to-center distance 125 mm, compatible with tubra®-PGM/PGR with zinc-lamella coating

WP040000

VM St DN 25



tubra®-Connection kit PFW/R

Corner ball valves for 2-way manifold and for heating circuit group PGM DN 25

WP040010

Connection kit PFW/R



tubra®-Connection kit Friwa

Corner ball valves and one straight-through ball valve for fresh water station

WP040011

Connection kit Friwa PFW/R

WP040021

Connection kit Friwa Duo



tubra®-Connection kit PFW/R/etherm

For direct connection of the etherm to the PFW/R system storage tank

WP040112

Connection kit PFW/R/etherm



tubra®-Connection kit Solar

For connecting the solar station directly to the PFW/R system storage tank

WP040113

Connection kit Solar



tubra®-Connection kit Duo/PGM

Corner ball valves for heating circuit group PGM DN 25

WP040020

Connection kit Duo/PGM



tubra®-Connection kit Duo/etherm

For direct connection of the etherm to the duo storage tank

WP040022

Connection kit Duo/etherm



Dirt trap/sludge separator

Semi-automatic dirt trap/sludge separator. With additional filter and magnet, specially designed for heat pump systems.

WP040210

WP040211

Dirt trap 1"

Dirt trap 5/4"



Insulation for dirt trap

Insulation for dirt/sludge separator with magnet and manual cleaning

WP040212

Insulation dirt trap


Check valve

Check valve type EA, connections female-female, G 1" (ISO 228-1) female.
 Maximum operating pressure: 10 bar,
 medium temperature range: 5–65 °C

WP040220
WP040221

Check valve 1"
Check valve 5/4"


tubra®-mag-jet

Magnetite separators for retrofitting
 pump units

WP040202

MAG-jet DN 20


tubra®-mag-jet Replacement magnetic chain

For installation in mag-jet DN 20/25 and
 hydraulic diverters DN 25/32

WP040203

Replacement magnetic chain


tubra®-aero-fix

System vent for fresh water buffer tanks
 and system storage tanks; connects to the
 top center of the system storage tank;
 includes a reducer for a G1 1/4 female
 thread

WP040204

Aero-fix


tubra®-Security Group

Includes shut-off ball valve, pressure
 gauge, and 3-bar safety valve

WP040205

Security Group


tubra®-MAG connection

Cross fitting with shut-off ball valve, boiler
 filling and drain valve, and expansion
 tank connection

WP040206

MAG connection


elector Test kit

The measurement kit for on-site analysis of heating and cooling water for pH, electrical conductivity, and total hardness.

- Reliable measurement results with simple and intuitive operation.
- Complies with the functional recommendations of VDI Guideline 2035 for heating water analysers.
- Determination of total hardness using a proven drop test.
- Robust pH sensor, calibratable with buffer solutions pH 7.00 and pH 10.00, in accordance with guideline requirements.
- Sturdy conductivity sensor, low-maintenance and easy to calibrate.
- Measurement display with automatic temperature compensation.
- Functional plastic case with contoured foam to protect all parts during storage and transport.

WP030000
elector Test kit

includes MP-7 combination meter

elector Heating water analysis in the laboratory

Heating water analysis in accordance with VDI 2035 and DIN 50930-6, including interpretation of measured values and recommendations for action.

Measured values: Colour, odour, suspended solids, deposits, pH value, electrical conductivity, calcium, magnesium, total alkaline earth metals, total hardness, carbonate hardness, base capacity up to pH 8.2 ($K_{B8.2}$), acid capacity up to pH 4.3 ($K_{S4.3}$), acid capacity up to pH 8.2 ($K_{S8.2}$), sodium, chloride, nitrate, sulphate, phosphate (as P), silicate (as Si), aluminium, iron, copper, zinc, total organic carbon (TOC)

WP030001
Heating water analysis

elector Corrosion protection devices

Reaction tank for electrochemical water treatment to prevent corrosion in heating and cooling systems with a system volume of up to 1.5 m³.

- Stabilizes the pH level to ensure the formation of a protective layer on the metals in the system.
- Continuously consumes dissolved oxygen, which is thus no longer available to cause corrosion.
- Removes magnetic particles via an ultra-strong neodymium magnetic filter rod, thereby helping to protect sensitive components.
- Effectively removes circulating sludge and particles for clean system water.
- Collects and removes circulating air bubbles to prevent malfunctions and corrosion.

WP030100
elector XS5-V (full flow)

System volume: 0.5 m³

WP030101
elector XS5-B (bypass)

System volume: 0.5 m³

WP030110
elector S10-V (full flow)

System volume: 1.5 m³

WP030111
elector S10-B (bypass)

System volume: 1.5 m³


CLARIMAX Water filtration system

The water filtration system with replaceable cartridges delivers top-quality fully demineralized water for refilling heating and cooling systems.

- Suitable for refilling technical water circuits in fixed installations or as a mobile service cartridge.
- The water filtration system with replaceable cartridges eliminates the time-consuming and tedious replacement of ion exchange resins.
- Consistently top-quality resin, as there is no contamination of the resins due to unintended contact.
- Includes mounting bracket for wall installation and DVGW-certified backflow preventers in accordance with DIN EN 13959.

WP030200
CLARIMAX Water filtration system

Water filtration system, including filter cartridge, filter head, mounting bracket, and backflow preventer.

Capacity: 0.34 m³

Flow rate: 60 l/h

WP030201
CLARIMAX Filter cartridge
WP030202
Reducing Fitting Set 3/4" x 3/8"
WP030203
Backflow Preventer 3/8"

WP030204
Boiler-filling combination unit

with system separator type 1/2" female x 1/2" male, type BA


Measurement Computer

Measuring instrument for monitoring conductivity and capacitance

WP030210
Measurement Computer H2O

CLARIMAX 1200 DM+LED

Premium total desalination of make-up and top-off water for heating and cooling systems with pH control and cartridge technology

- High-quality ion-exchange resin in a replaceable cartridge with a high proportion of anion resin for reliable total desalination at a controlled pH level.
- Low electrical conductivity, low total hardness at an ideal pH value for low-salt operation of heating systems in accordance with VDI 2035.
- Extremely easy operation thanks to replaceable cartridges, eliminating the need for time-consuming resin replacement.
- Integrated conductivity and capacity monitoring.
- Robust design makes it suitable both as a service water filtration system and for on-site installation.

WP030250
CLARIMAX 1200 DM+LED

Capacity: 1.24 m³

Flow rate: 5 l/min

WP030251
Filter cartridge
WP030252
AC adapter
WP030253
Flush valve with hose
WP030254
Armored hose

3/4", 250 cm



WP050000

Ground wires 160

160 mm – 2 x 32 mm PEX pipes and
32/25 mm conduit pipes

Weight: 2.84 kg/m

Flow rate: 1.078 l/min

Heat capacity: 30 – 60 kW

WP050001

Ground wires 200

200 mm – 2 x 40 mm PEX pipes and
40/32 mm conduit pipes

Weight: 3.50 kg/m

Flow rate: 1.670 l/min

Heat capacity: 40 – 100 kW

Ground wires - HP insulated

- Central pipe for heating: PE-Xa/SDR 11/PN 6
- Continuous operating temperature: 80°C
- Maximum operating temperature: 95°C
- EVOH vapor diffusion barrier in accordance with ISO 17455
- Pipes color-coded (red and blue) to ensure correct installation
- Black insulating pipe made of UV-resistant HDPE



Threaded coupling

PE-X threaded coupling 32 mm 1"
male

WP050010

Threaded coupling 32

PE-X threaded coupling 40 mm 1 1/4"
male

WP050011

Threaded coupling 40



Dust cap

Dust cap 160 mm 4 x 32 mm

WP050020

Dust cap 160

Dust cap 200 mm 2 x 40 mm + 2 x 32 mm

WP050021

Dust cap 200



Mounting point

1" I-A

WP050030

Mounting point 1"

1 1/4" I-A

WP050031

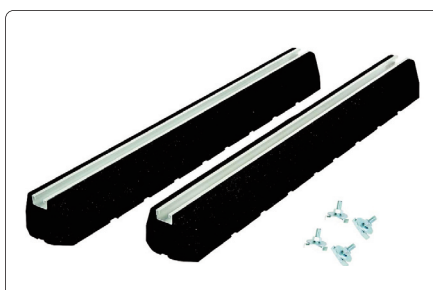
Mounting point 1 1/4"



Quadruple compression cap

WP050029

Compression cap



Base

The bases are made of recycled SBR rubber and feature a recessed 40 x 21 mm aluminium profile; the mounting kit includes
M10 x 30 mm screws for securing the mounting hardware.

WP060000

Base 100

L x W x H: 600 x 135 x 100 mm

Load capacity: 195 kg

WP060001

Base 150

L x W x H: 600 x 200 x 150 mm

Load capacity: 300 kg

WP060002

Base 230

L x W x H: 600 x 200 x 230 mm

Load capacity: 300 kg

WP060003

Insert screws

Set of insert screws

(2 pieces) M10 x 30 mm

The illustration and design are non-binding and only exemplary.

MULTIBETON GmbH, Heuserweg 23, DE-53842 Troisdorf-Spich, Phone +49 2241 25200-0, Fax +49 2241 25200-99

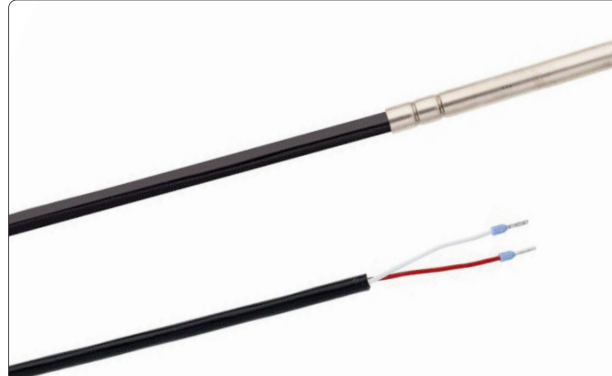
E-Mail info@multibeton.com, Internet www.multibeton.com


Power distribution

Ready-to-connect distribution board for quick and easy heat pump installation; Complete with protection for: outdoor unit, indoor unit, supplementary heating element, and control circuits

- Rated current 40 A
- Maximum safety thanks to integrated residual current circuit breaker (RCCB) type B G/KV
- Heat pump protection via surge arrester type T2
- Consumption data always in view thanks to MID-certified electricity meter
- High flexibility: Connection to various smart home systems via S0 interface and Modbus RTU
- § 14a EnWG control via SG-Ready interface

WP070001	Power distribution WM-S
WP070002	Power distribution WM-M
WP070003	Power distribution WM-L
WP070004	Power distribution WM-XL


Temperature sensor

Cable sensor with protective sleeve and PVC cable

WP070000	Temperature sensor 5 m PVC 2 x 0.25 mm ² (black)
WP070020	Temperature sensor solar 5 m PVC 2 x 0.25 mm ² (black)
WP070012	Temperature sensor PT1000 2 m


Heating controller Sorel

Weather-compensated heating controller for different heating and cooling systems

WP070010	Heating controller LHCC 3S
-----------------	-----------------------------------


Touch-up paint pen

Touch-up paint pen RAL 9005 jet black matt

WP000999	Touch-up paint pen RAL 9005
-----------------	-----------------------------

WP090010	Online commissioning	WP099999-100	Call-out charges for distances up to 100 km
WP090011	Online commissioning for each additional heat pump in a cascade system	WP099999-150	Call-out charges for distances up to 150 km
WP099999	Manufacturer's service, hourly rate	WP099999-250	Call-out charges for distances up to 250 km
		WP099999-251	Call-out charges from 251 km
		WP099999-252	Additional kilometres from 251 km onwards

WP000700	High pressure switch		WP000729	Fin Heat Exchanger	WM-S
WP000701	Low pressure switch		WP000730	Fin Heat Exchanger	WM-M
WP000702	High pressure sensor		WP000731	Fin Heat Exchanger	WM-L
WP000703	Low pressure sensor		WP000732	Fin Heat Exchanger	WM-XL
WP000704	Water pump		WP000733	Plate heat exchanger	WM-S
WP000705	Air vent valve & Magnetic filter		WP000734	Plate heat exchanger	WM-M
WP000706	Flow sensor		WP000735	Plate heat exchanger	WM-L
WP000707	Pressure relief valve		WP000736	Plate heat exchanger	WM-XL
WP000708	Water flow switch		WP000737	Four-way valve body	WM-S
WP000709	Motherboard heat pump		WP000738	Four-way valve body	WM-M
WP000710	Motherboard hydraulic station		WP000739	Four-way valve body	WM-L & WM-XL
WP000711	Driver board	WM-L & WM-XL	WP000740	Four-way valve coil	
WP000712	Fan driver board	WM-L & WM-XL	WP000741	Electric expansion valve body	WM-S & WM-M
WP000713	Filter board	WM-L & WM-XL	WP000742	Electric expansion valve body	WM-L & WM-XL
WP000714	Wired controller	WM-HDS	WP000743	Electric expansion valve coil	WM-S & WM-M
WP000715	Fan motor	WM-S & WM-M	WP000744	Electric expansion valve coil	WM-L & WM-XL
WP000716	Fan motor	WM-L & WM-XL	WP000745	Crankcase Heater	WM-S
WP000717	Refrigerant Leakage Sensor		WP000746	Crankcase Heater	WM-M
WP000718	Electric Heater	WM-HDS	WP000747	Crankcase Heater	WM-L & WM-XL
WP000719	Temperature sensor in-/outlet	WM-L & WM-XL	WP000748	Chassis Heater	WM-S & WM-M
WP000720	Temperature sensor for terminal 1200 mm, green		WP000749	Chassis Heater	WM-L & WM-XL
WP000721	Temperature sensor for terminal 1200 mm, red		WP000750	Expansion tank	WM-HDS
WP000722	Temperature sensor for terminal 1600 mm, black		WP000751	Solenoid three-way valve	WM-HDS
WP000723	Temperature sensor for terminal 1200 mm, purple		WP000752	Inductor	WM-S
WP000724	Compressor	WM-S	WP000753	Inductor	WM-M
WP000725	Compressor	WM-M	WP000754	Inductor	WM-L & WM-XL
WP000726	Compressor	WM-L & WM-XL			
WP000727	Fan Blade	WM-S & WM-M			
WP000728	Fan Blade	WM-L & WM-XL			

